


CMOS Dual RS232 Transmitter/Receiver (mAX232 upgrade/IND TEMP),± 15KV ESD Protection, SOIC-16

Manufacturers	<a href="#">Analog Devices, Inc</a>
Package/Case	SO-16
Product Type	Interface ICs
RoHS	Rohs
Lifecycle	

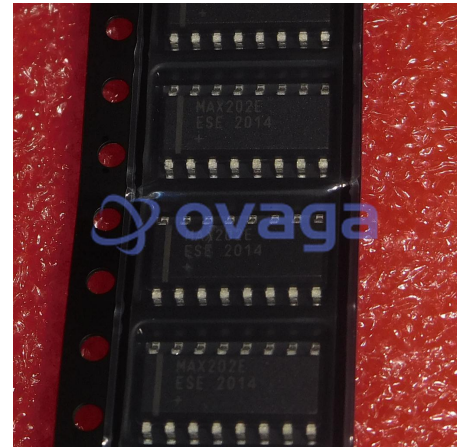

Images are for reference only

Please submit RFQ for MAX202EESE+ or [Email to us: sales@ovaga.com](mailto:sales@ovaga.com) We will contact you in 12 hours.

[RFQ](#)

## General Description

MAX202EESE+ is a transceiver IC (Integrated Circuit) that is commonly used for RS-232 serial communication. Here are some of its features:

### Features

It is a dual-channel device, meaning it can transmit and receive data on two separate channels simultaneously.

It operates on a wide range of input voltages, from +4.5V to +5.5V.

It has a low-power shutdown mode, which allows it to conserve energy when it is not in use.


It is designed to withstand electrostatic discharge (ESD) of up to ±15kV, making it highly durable and reliable.

### Application

Serial communication between a computer and a peripheral device, such as a printer or modem.

Communication between microcontrollers or other embedded systems.

Data logging and transfer in industrial or scientific settings.

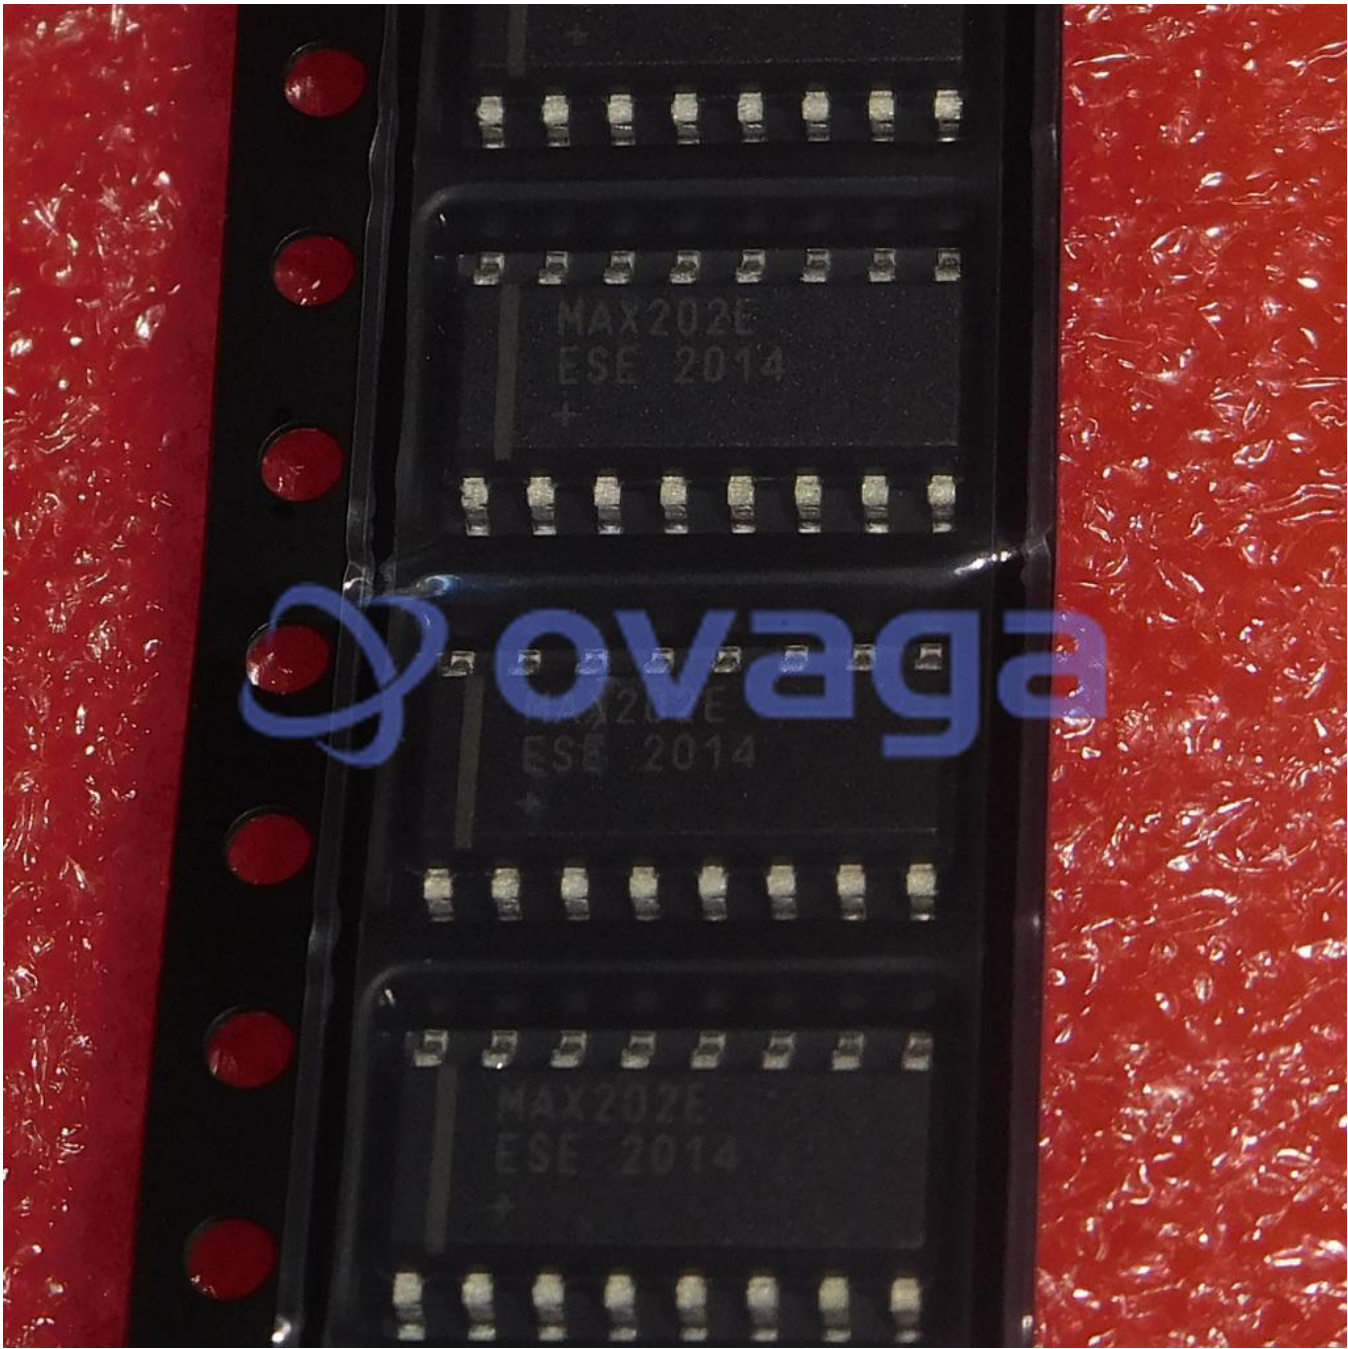

### Related Products




[MAX3232EEUE](#)

Analog Devices, Inc  
TSSOP-16



[MAX4544EUT+T](#)

Analog Devices, Inc  
SOT-23-6



[MAX202CSE](#)

Analog Devices, Inc  
SOP-16




[MAX485ECPA](#)

Analog Devices, Inc  
DIP-8



[MAX3221EEUE](#)

Analog Devices, Inc  
TSSOP-16



[MAX3223EEUE](#)

Analog Devices, Inc  
TSSOP-16



[MAX490MJA](#)

Analog Devices, Inc  
CDIP-8



[MAX3232EUE](#)

Analog Devices, Inc  
TSSOP-16