


Switching Voltage Regulators 34VOUT, 4A Buck-boost Module Regulator

Manufacturers	Analog Devices, Inc
Package/Case	141LGA
Product Type	Power Management ICs
RoHS	
Lifecycle	

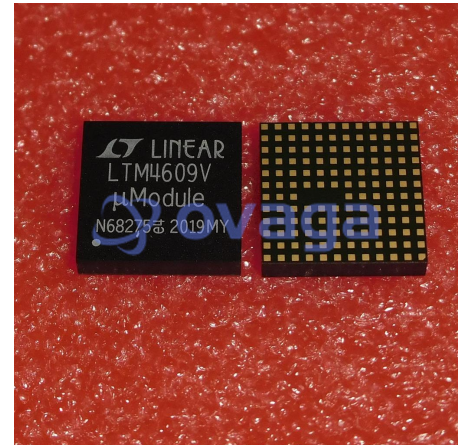

Images are for reference only

Please submit RFQ for LTM4609IV#PBF or [Email to us: sales@ovaga.com](mailto:sales@ovaga.com) We will contact you in 12 hours.

[RFQ](#)

General Description

The LTM4609 is a high efficiency switching mode buckboost power supply. Included in the package are the switching controller, power FETs and support components. Operating over an input voltage range of 4.5V to 36V, the LTM4609 supports an output voltage range of 0.8V to 34V, set by a resistor. This high efficiency design delivers up to 4A continuous current in boost mode (10A in buck mode). Only the inductor, sense resistor, bulk input and output capacitors are needed to finish the design.

The low profile package enables utilization of unused space on the bottom of PC boards for high density point of load regulation. The high switching frequency and current mode architecture enable a very fast transient response to line and load changes without sacrificing stability. The LTM4609 can be frequency synchronized with an external clock to reduce undesirable frequency harmonics.

Fault protection features include overvoltage and foldback current protection. The DC/DC μModule® regulator is offered in small 15mm × 15mm × 2.82mm LGA and 15mm × 15mm × 3.42mm BGA packages. The LTM4609 is available with SnPb (BGA) or RoHS compliant terminal finish.

Features

Single Inductor Architecture Allows VIN Above, Below or Equal to VOUT

Wide VIN Range: 4.5V to 36V

Wide VOUT Range: 0.8V to 34V

IOUT: 4A DC (10A DC in Buck Mode)

Up to 98% Efficiency

Current Mode Control

Power Good Output Signal

Phase-Lockable Fixed Frequency: 200kHz to 400kHz

Ultrafast Transient Response

Current Foldback Protection

Output Overvoltage Protection

Small Surface Mount Footprint, Low Profile(15mm × 15mm × 2.82mm) LGA and(15mm × 15mm × 3.42mm) BGA Packages


SnPb (BGA) or RoHS Compliant (LGA and BGA) Finish

Application


Telecom, Servers and Networking
Equipment

Industrial and Automotive Equipment

High Power Battery-Operated
Devices

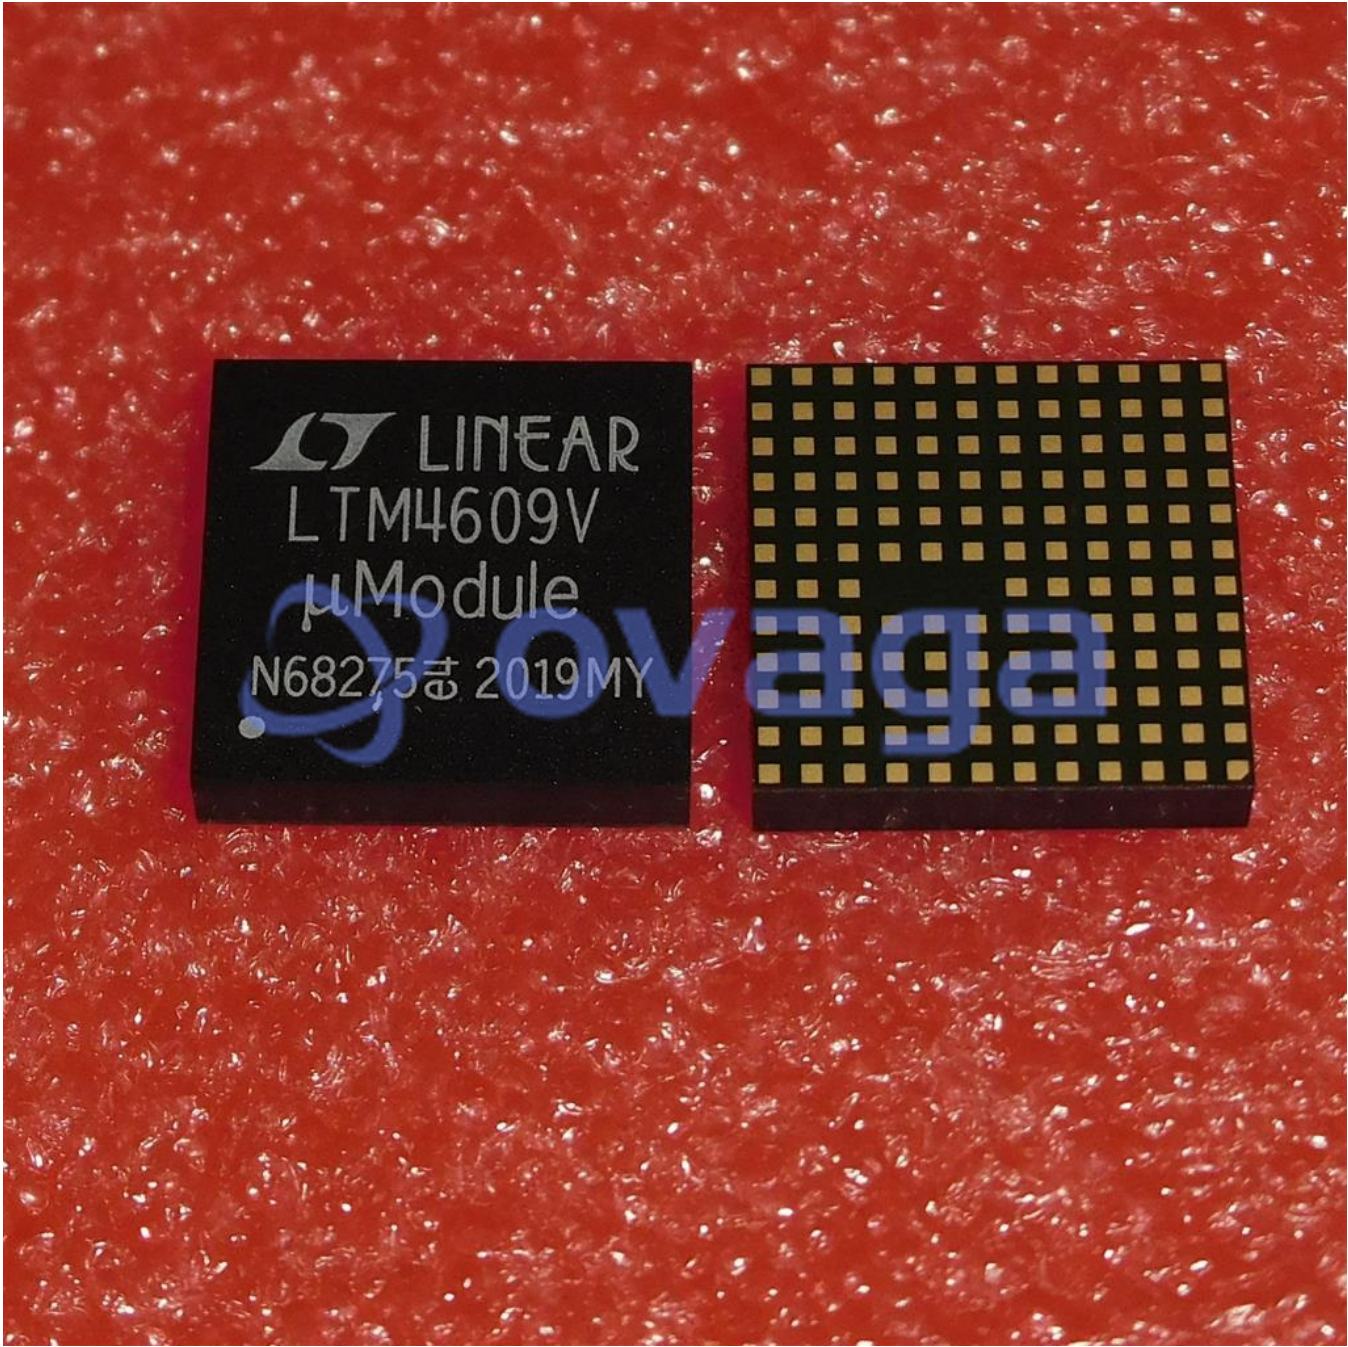

Related Products



[LT3763EFE](#)
Analog Devices, Inc
TSSOP28



[LT1038CK](#)
Analog Devices, Inc
TO-3



[LTC4417IUF](#)
Analog Devices, Inc
QFN-24



[LTC3440EMS](#)
Analog Devices, Inc
MSOP10



[LTC1966CMS8#PBF](#)

Analog Devices, Inc
MSOP-8P



[LTC2990IMS#PBF](#)

Analog Devices, Inc
10MSOP



[LTM8045EY#PBF](#)

Analog Devices, Inc
BGA40



[LT4295IUFD#PBF](#)

Analog Devices, Inc
28-WFQFN