

Conv DC-DC 3.7V to 36V Synchronous Step Down Dual-Out 0.8V to 35.28V 1.4A/1.4A  
Automotive 24-Pin QFN EP Tube

Manufacturers	<a href="#">Analog Devices, Inc</a>
Package/Case	QFN24
Product Type	Power Management ICs
RoHS	Pb-free Halide free
Lifecycle	



Images are for reference only

Please submit RFQ for LT3508EUF#PBF or [Email to us: sales@ovaga.com](mailto:sales@ovaga.com) We will contact you in 12 hours.

[RFQ](#)

## General Description

The LT3508 is a dual current mode PWM step-down DC/DC converter with internal power switches capable of generating two 1.4A outputs. The wide input voltage range of 3.7V to 36V makes the LT3508 suitable for regulating power from a wide variety of sources, including automotive batteries, 24V industrial supplies and unregulated wall adapters. Both converters are synchronized to a single oscillator programmable up to 2.5MHz and run with opposite phases, reducing input ripple current. Its high operating frequency allows the use of small, low cost inductors and ceramic capacitors, resulting in low, predictable output ripple. Each regulator has independent tracking and soft-start circuits and generates a power good signal when its output is in regulation, easing power supply sequencing and interfacing with microcontrollers and DSPs.

Cycle-by-cycle current limit, frequency foldback and thermal shutdown provide protection against shorted outputs, and soft-start eliminates input current surge during startup. The low current (<math><2\mu\text{A}</math>) shutdown mode enables easy power management in battery-powered systems.

## Features

Wide Input Voltage Range: 3.7V to 36V

Two 1.4A Output Switching Regulators with Internal Power Switches

Adjustable 250kHz to 2.5MHz Switching Frequency

Synchronizable over the Full Frequency Range

Anti-Phase Switching Reduces Ripple

Uses Small Inductors and Ceramic Capacitors

Accurate Programmable Undervoltage Lockout

Independent Tracking, Soft-Start and Power Good Circuits Ease Supply Sequencing

Output Adjustable Down to 800mV

Small 4mm × 4mm 24-Pin QFN or 16-Pin Thermally Enhanced TSSOP Surface Mount Packages

## Application

Automotive


DSP Power Supplies

Wall Transformer Regulation

DSL and Cable Modems

PCI Express



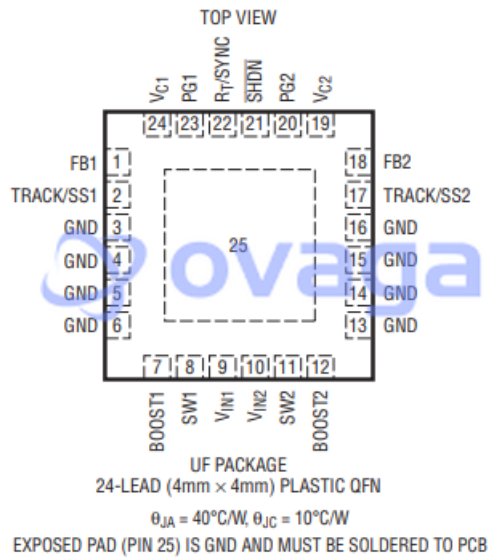


## Related Products



### [LT3763EFE](#)

Analog Devices, Inc  
TSSOP28



### [LTC4417IUF](#)

Analog Devices, Inc  
QFN-24



### [LTC1966CMS8#PBF](#)

Analog Devices, Inc  
MSOP-8P



### [LTM8045EY#PBF](#)

Analog Devices, Inc  
BGA40



### [LT1038CK](#)

Analog Devices, Inc  
TO-3



### [LTC3440EMS](#)

Analog Devices, Inc  
MSOP10



### [LTC2990IMS#PBF](#)

Analog Devices, Inc  
10MSOP



### [LT4295IUFD#PBF](#)

Analog Devices, Inc  
28-WFQFN