

250 kSPS, 10-Bit ADC in 6 Lead SC70; Package: SC70; No of Pins: 6; Temperature Range: Industrial

Manufacturers	Analog Devices, Inc
Package/Case	SC70-6
Product Type	Data Conversion ICs
RoHS	Rohs
Lifecycle	




Figure 5. 6-Lead SC70 Pin Configuration

Images are for reference only

Please submit RFQ for AD7910AKSZ-500RL7 or [Email to us: sales@ovaga.com](mailto:sales@ovaga.com) We will contact you in 12 hours.

[RFQ](#)

General Description

The AD7910/AD7920 are 10-bit and 12-bit, high speed, low power, successive-approximation ADCs respectively. The parts operate from a single 2.35 V to 5.25 V power supply and feature throughput rates up to 250 kSPS. The parts contain a low-noise, wide bandwidth track/hold amplifier, which can handle input frequencies in excess of 6 MHz.

The conversion process and data acquisition are controlled using CS and the serial clock, allowing the devices to interface with microprocessors or DSPs. The input signal is sampled on the falling edge of CS and the conversion is also initiated at this point. There are no pipelined delays associated with the part.

The AD7910/AD7920 use advanced design techniques to achieve very low power dissipation at high throughput rates.

The reference for the part is taken internally from VDD. This allows the widest dynamic input range to the ADC. Thus the analog input range for the part is 0 to VDD. The conversion rate is determined by the SCLK.

Features

Specified for VDD of 2.35 V to 5.25 V

Low Power: 3 mW typ at 250 KSPS with 3 V Supplies 12.5 mW typ at 250 KSPS with 5 V Supplies

Wide Input Bandwidth: 70 dB SNR at 100 kHz Input Frequency

Flexible Power/Serial Clock Speed Management

Throughput Rate: 250 kSPS

No Pipeline Delays

High Speed Serial Interface SPI®/QSPI™/MICROWIRE™/DSP Compatible

Standby Mode: 1 μ A max

6-Lead SC70 Package

8-Lead μ SOIC Package

Application

Battery-powered systems

Personal digital assistants

Medical instruments

Mobile communications

Instrumentation and control systems

Data acquisition systems

High speed modems

Optical sensors



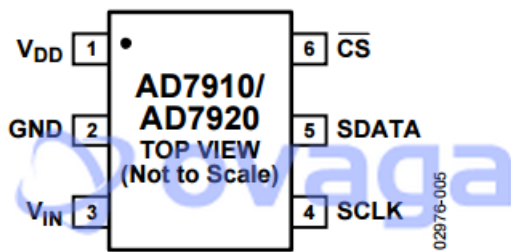


Figure 5. 6-Lead SC70 Pin Configuration

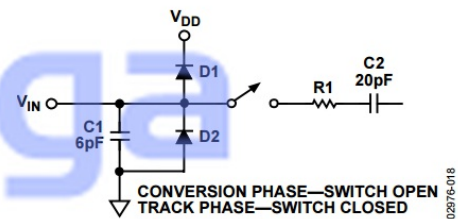


Related Products

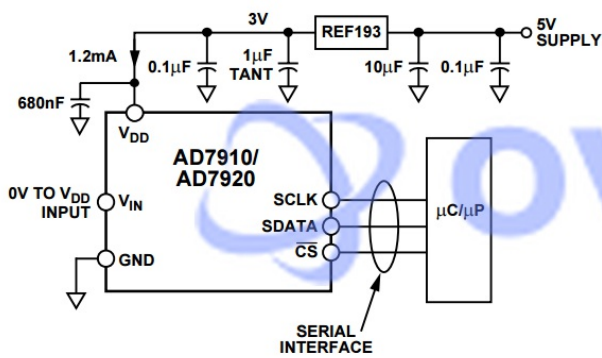

[ADAS3022BCPZ](#)

Analog Devices, Inc
LFCSP-40



[AD7266BSUZ](#)

Analog Devices, Inc
TQPF-32




[AD574AJNZ](#)

Analog Devices, Inc
PDIP-28



[AD7401YRWZ](#)

Analog Devices, Inc
SOIC-16




[AD7938BSUZ](#)

Analog Devices, Inc
TQFP-32



[AD7192BRUZ-REEL](#)

Analog Devices, Inc
TSSOP-24



[AD7124-8BCPZ-RL7](#)

Analog Devices, Inc
LFCSP-32



[AD9680BCPZ-500](#)

Analog Devices, Inc
LFCSP-64