


IC REG BUCK SYNC ADJ 0.6A 8MSOP

Manufacturers	<a href="#">Analog Devices, Inc</a>
Package/Case	MSOP-8
Product Type	Power Management ICs
RoHS	
Lifecycle	

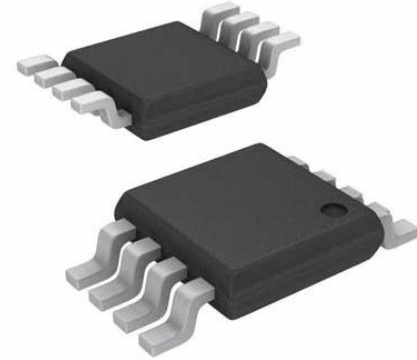

Images are for reference only

Please submit RFQ for LTC1877EMS8#TRPBF or [Email to us: sales@ovaga.com](mailto:sales@ovaga.com) We will contact you in 12 hours.

[RFQ](#)

## General Description

The LTC1877 is a high efficiency monolithic synchronous buck regulator using a constant-frequency, current mode architecture. Supply current during operation is only 10 $\mu$ A and drops to < 1 $\mu$ A in shutdown. The 2.65V to 10V input voltage range makes the LTC1877 ideally suited for both single and dual Li-Ion battery-powered applications. 100% duty cycle provides low dropout operation, extending battery life in portable systems.

Switching frequency is internally set at 550kHz, allowing the use of small surface mount inductors and capacitors. For noise sensitive applications the LTC1877 can be externally synchronized from 400kHz to 700kHz. Burst Mode operation is inhibited during synchronization or when the SYNC/MODE pin is pulled low, preventing low frequency ripple from interfering with audio circuitry.

The internal synchronous switch increases efficiency and eliminates the need for an external Schottky diode. Low output voltages are easily supported with the 0.8V feedback reference voltage. The LTC1877 is available in a space saving 8-lead MSOP package. Lower input voltage applications (less than 7V abs max) should refer to the LTC1878 data sheet.

## Features

High Efficiency: Up to 95%

Very Low Quiescent Current: Only 10 $\mu$ A During Operation

600mA Output Current at >

2.65V to 10V Input Voltage Range

550kHz Constant-Frequency Operation

No Schottky Diode Required

Low Dropout Operation: 100% Duty Cycle

Synchronizable from 400kHz to 700kHz

Selectable Burst Mode<sup>®</sup> Operation or Pulse-Skipping Mode

0.8V Reference Allows Low Output Voltages

Shutdown Mode Draws < 1 $\mu$ A Supply Current

Current Mode Control for Excellent Line and Load Transient Response

Overcurrent and Overtemperature Protected

Available in 8-Lead MSOP Package

## Application

Cellular Telephones

Wireless Modems


Personal Information Appliances

Portable Instruments

Distributed Power Systems

Battery-Powered Equipment

## Related Products



### [LT3763EFE](#)

Analog Devices, Inc  
TSSOP28



### [LT1038CK](#)

Analog Devices, Inc  
TO-3



### [LTC4417IUF](#)

Analog Devices, Inc  
QFN-24



### [LTC3440EMS](#)

Analog Devices, Inc  
MSOP10



### [LTC1966CMS8#PBF](#)

Analog Devices, Inc  
MSOP-8P




### [LTC2990IMS#PBF](#)

Analog Devices, Inc  
10MSOP



### [LTM8045EX#PBF](#)

Analog Devices, Inc  
BGA40



### [LT4295IUFD#PBF](#)

Analog Devices, Inc  
28-WFQFN